


DSQ Exhaust Requirements

Supply a 1 in. ID hose to a fume hood or other suitable exhaust *port*¹ .

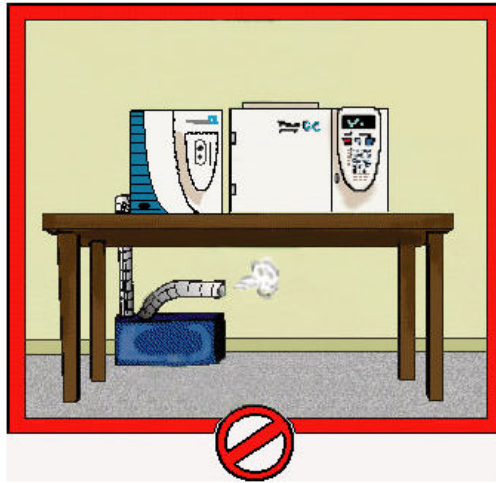

The pump exhaust port includes a 1 in. (25.4 mm) hose fitting. Much of what is introduced into the TRACE DSQ is eventually exhausted from the rotary-vane pump, along with the small amount of oil vapor that these pumps characteristically emit. Therefore, you should provide a suitable exhaust outlet for the pump.

¹ Consult local regulations for instructions in exhausting fumes from your system.